

LUNERA CFL LED

LED Replacement for 2-pin CFL




Description

The LUNERA CFL LED is a plug-and-play, Ballast Driven LED replacement for CFL downlights with 2-pin G24d-series (magnetic ballast) sockets. Simply choose the configuration for Horizontal or Vertical versions, plug it in like any CFL lamp, and enjoy the superior light quality and energy savings - no need to bypass the CFL ballast.


These beautiful lamps have a Color Rendering Index of 84 and deliver 900 lumens of usable light. The Lunera CFL LED is available in 2700K, 3000K, 3500K and 4000K color temperatures.

The long lifespan of the Lunera CFL LED is rated at 50,000 hours, 5x longer than CFLs, and is supported by a five year warranty.

The Lunera CFL LED offers 50%+ energy savings and is compatible with 18W or 26W 2-pin CFLs, making it easy to save even more energy.



Horizontal



Vertical

Features

- Directly replaces 18W or 26W CFLs (2-pin)
- Plug-and-Play installation
- >80 CRI
- CCT 2700K, 3000K, 3500K and 4000K
- 50,000 hours to L70 Lifespan
- 5-Year Warranty



Ordering Information

Example: HN-V-G24D-26W-2700-G2

Series	Version	Socket Type	Lamp Wattage Replaced	CCT	Generation
HN: Lunera CFL LED	V: Vertical H: Horizontal	G24D Recessed downlight with G24d series 2-Pin CFL socket	26W 18W, 26W CFLs	2700: 2700K 3000: 3000K 3500: 3500K 4000: 4000K	G2 2nd Generation

PROJECT	CONTACT	MODEL NO.
REFERENCE NO.	QUANTITY	DATE

For Technical Support:

<https://lunera.com/freshdesk.com/support/home>

www.lunera.com T (650) 241-3875

Product Specifications - Horizontal Mount Lamp

Illumination

Color Temperatures	2700K, 3000K, 3500K, 4000K	
Delivered Lumens:	@2700K	883lm (horizontal), 920lm (vertical)
	@3000K	860lm (horizontal), 962lm (vertical)
	@3500K	930lm (horizontal), 969lm (vertical)
	@4000K	954lm (horizontal), 994lm (vertical)
CRI	>80	
Color Consistency	Lunera TruColor Proprietary Process	
Lumen Maintenance (L70)	50,000+ hours life	

Electrical System

Power Factor	> 90% (determined by installed ballast)
Total Harmonic Distortion	< 20% (determined by installed ballast)
Input Voltage	Driven by CFL Ballast
Average Lamp Power	13W
Total Power (Lamp + Ballast)	15W (Horizontal), 15W (Vertical)
Lamp Wattage Replaced	18W, 26W (32W and 42W compatible)
Dimming	Non-dim applications only

Physical

Weight	0.25 lbs
Housing and Finish	Aluminum, Painted
Optics	Optical Acrylic Diffusion

Environment

Ambient Operating Temp	-4°F to 100°F (-20°C to 40°C)
Ambient Operating Humidity	20% to 85% RH, non-condensing
Max Heat Sink Temp	221°F (105°C)

Installation

Socket Type (magnetic)	G24d series 2-Pin CFL socket
------------------------	------------------------------

Certifications & Qualifications

UL	Recognized, US & CAN
RoHS Compliant	Contains no lead or mercury
LM79, LM80, IES Files	Available upon request

Warranty

Warranty	5 years
----------	---------

Application Notes

The Lunera CFL LED is intended for operation with ballasts from the following manufacturers:

- Triad/Universal Lighting Technologies
- OSRAM Sylvania
- Energy Savings
- Hatch model #s C213UNVME, QTP 2x26CF/UNV DM, 226/32/42, FUNV DM, ICF-2S18-H1-LD, ES-2-CFQ-26-120-C, HC226PS/UV/WJ

The Lunera CFL LED is not intended for use in lensed downlights.


For applications containing dimming ballasts, please contact Lunera for specific compatibility.

CAUTION - IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT MANUFACTURER.


THIS LAMP ONLY OPERATES ON MAGNETIC BALLASTS. IF LAMP DOES NOT LIGHT WHEN THE LUMINAIRE IS ENERGIZED, REMOVE LAMP FROM LUMINAIRE AND CONTACT LAMP MANUFACTURER OR QUALIFIED ELECTRICIAN.

Photometry


The Lunera CFL LED vs. 26W CFL, compared in the same downlight lamp.

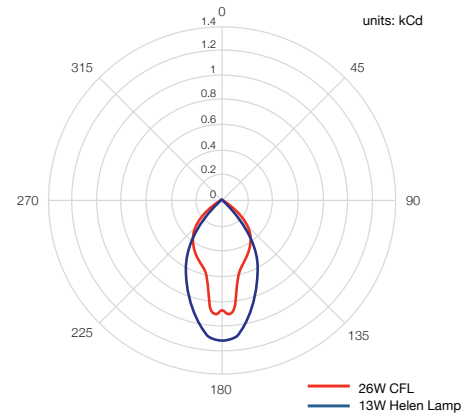


Vertical Package



Front View




Side View




Bottom View 4-pin


Horizontal Package

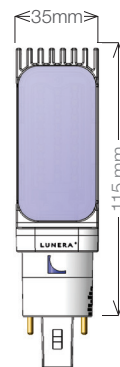

Front View



Side View



Bottom View 4-pin

For Technical Support:

<https://lunera.com/freshdesk.com/support/home>

R92916

www.lunera.com T (650) 241-3875

