

LUNERA T5HO LED 4FT

LED Replacement for Bi-Pin 4FT T5HO Fluorescent Lamp

Ballast Driven



Description

The LUNERA T5HO LED 4FT is an energy saving, linear LED replacement for a 54W, G5 Bi-Pin T5HO fluorescent lamp. It operates off of the existing electronic ballast and supports instant start, rapid start, and programmed start electronic ballasts.

This beautiful LED lamp emits light over 330° of its surface, has a Color Rendering Index (CRI) of 82 and delivers over 3,000 lumens of usable light. The T5HO LED 4FT features a glass tube for improved optics and is available in 3000K, 3500K, 4000K and 5000K color temperatures.

The Lunera T5HO LED 4FT delivers over 50% energy savings and has a long lifespan rated at 50,000 hours and is supported by a five-year warranty. It contains no mercury allowing for non-hazardous waste disposal.

This lamp does NOT support line voltage.



Features

- Directly replaces 54W 4ft T5HO fluorescent lamps
- Supports plug-and-play ballast-driven installation
- Delivers over 3,000 lumens of usable light
- >80 CRI
- CCT 3000K, 3500K, 4000K and 5000K
- 50,000 hours life to L70
- 5-Year Warranty



Ordering Information

Example: HN-T5-D-48-25W-830-G1

Series	Socket Type	Power Supply	Dimension	Lamp Wattage	CCT	Generation
HN Lunera T5HO	T5 Fixture with Bi-Pin G5 T5 sockets	D Supports electronic T5 fluorescent ballast	48 48 inch tube	25W Replaces 54W, 4FT T5HO Fluorescent Lamp	830 3000 Kelvin 835 3500 Kelvin 840 4000 Kelvin 850 5000 Kelvin	G1 1st Generation Frosted

PROJECT	CONTACT	MODEL NO.
REFERENCE NO.	QUANTITY	DATE

For Technical Support:

www.lunera.com

T (650) 241-3874

1 of 2

<https://lunera.com/freshdesk.com/support/home>

Product Specifications

Illumination

Color Temperatures	3000K, 3500K, 4000K, 5000K	
Delivered Lumens	3000K	2,900lm
	3500K	3,000lm
	4000K	3,200lm
	5000K	3,200lm
CRI	>80	
Color Consistency	Lunera TruColor Proprietary Process	
Lumen Maintenance (L70)	50,000+ hours life	

Electrical System

Power Factor	> 90%
Total Harmonic Distortion	< 20%
Input Voltage	Dependent of the ballast (Lamp operates off of rapid, instant, and programmed start electronic ballasts)
Lamp Power	25W
Total Power	28W
Lamp Wattage Replaced	54W and less
Dimming	No
Ballast Factor	The T5HO LED will respond to Low Ballast Factor (LBF) and Normal Ballast Factor (NBF) electronic ballasts the same way as fluorescent T5HO lamp; ratings above are for a NBF ballast.

Physical

Weight	0.25 lbs
Housing and Finish	Glass, White
Optics	Optical Glass Diffusion
Beam Spread	330°
Beam Angle	180°

Environment

Ambient Operating Temp	-40°F to 104°F (-40°C to 40°C)
Ambient Operating Humidity	Dry and Damp Certified

Installation

Socket Type	G5 Bi-Pin T5 socket (Shunted & Non-Shunted Tombstone)
Line Voltage	No, this lamp is NOT approved for use with line voltage.


Certifications & Qualifications

UL	Classified/Recognized
RoHS Compliant	Contains no lead or mercury
DLC Listed	Yes
LM79, LM80, IES Files	Available. Contact Lunera.

Warranty

Warranty	5 years
----------	---------

Dimensions

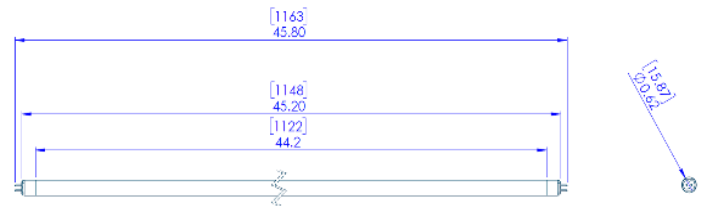

Application Notes

The T5HO LED 4FT may be used in open and enclosed fixtures. Indoors or outdoors.

This lamp supports shunted and non-shunted tombstones. Photometric and power data with 54W and 28W ballasts:

Ballast Wattage	Lamp Lumens	System Power
54W*	3,200lm	27.5W
28W**	1,300lm	10.6W

*Performance with Sunpark 154T5HO

**Performance with Sylvania 2x28T5/UNV

CAUTION

Turn power off when installing the lamp.

CAUTION - IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT MANUFACTURER.