

LUNERA T8 LED 8FT

LED Replacement for Single-Pin 8FT Fluorescent Tube
Ballast Driven




Description

The LUNERA T8 LED 8FT is a plug-and-play LED replacement for a 54W, 59W, 60W or 75W 8FT Single Pin (Fa8) T8 or T12 fluorescent lamp. It operates off of the existing electronic ballast and supports instant start, rapid start, and programmed start electronic ballasts.

This beautiful lamp emits light over 330° of its surface, has a Color Rendering Index (CRI) of 83 and delivers up to 4,400 lumens of usable light. The Lunera T8 LED 8FT is available in 3000K, 3500K, 4000K and 5000K color temperatures.

The Lunera T8 LED 8FT delivers over 50% in energy savings and has a long lifespan rated at 50,000 hours. It is supported by a five-year warranty.

The Lunera T8 LED 8FT does NOT support line voltage.

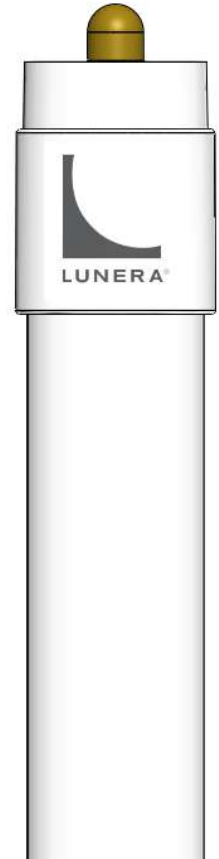

Features

- Directly replaces 54W/59W 8FT T8 or 60W/75W 8FT T12 fluorescent lamps with 33W LED lamps
- Supports plug-and-play Ballast Driven installation (Instant Start / Rapid Start / Programmed Start)
- Delivers up to 4,400 lumens of usable light
- >80 CRI
- CCT 3000K, 3500K, 4000K and 5000K
- 50,000 hours life to L70
- 5-Year Warranty

Ordering Information

Example: HN-T8S-D-96-33W-840-G1

Series	Socket Type	Power Supply	Dimension	Lamp Wattage	CCT	Generation
HN Lunera T8 LED	T8S Fixture with Single-Pin (Fa8) sockets	D Installed Instant Start Electronic Ballast (54W ~ 75W)	96 96 inch tube	33W Replaces 54W/59W T8 and 60W/75W T12 Single-Pin (Fa8) Fluorescent Lamp	830 3000 Kelvin 835 3500 Kelvin 840 4000 Kelvin 850 5000 Kelvin	G1 1st Generation

PROJECT	CONTACT	MODEL NO.
REFERENCE NO.	QUANTITY	DATE

Product Specifications

Illumination

Color Temperatures	3000K, 3500K, 4000K, 5000K
Delivered Lumens:	Up to 4,400lm
CRI	>80
Color Consistency	Lunera TruColor Proprietary Process
Lumen Maintenance (L70)	50,000+ hours life

Electrical System

Power Factor	> 90%
Total Harmonic Distortion	< 20%
Input Voltage	Dependent of the ballast (Lamp operates off of rapid, instant, and programmed start electronic ballasts)
Average Lamp Power	33W
System Power (Lamp + Ballast)*	36W
Lamp Wattage Replaced	54W/59W T8 and 60W/75W T12
Dimming	Yes, If used with dimming ballast
Ballast Factor	Ballast Factor <1. The Lunera T8 LED will respond to Low Ballast Factor (LBF), Normal Ballast Factor (NBF), and High Ballast Factor (HBF) electronic ballasts the same way as a fluorescent T8 lamp; ratings above are for a NBF ballast.

Physical

Weight	0.9 lbs
Housing and Finish	Glass, White
Optics	Optical Glass Diffusion, 330° Beam

Environment

Ambient Operating Temp	-28°F to 113°F (-20°C to 45°C)
Ambient Operating Humidity	Dry and Damp Certified

Installation

Socket Type	Single Pin (Fa8 Socket)
Line Voltage	No, this lamp is NOT approved for use with line voltage.

Certifications & Qualifications

UL	Listed (UL1993) US & Canada
RoHS Compliant	Contains no lead or mercury
DLC Listed	No category available
LM79, LM80, IES Files	Available. Contact Lunera.

Warranty

Warranty	5 years
----------	---------

*System power consumption associated with instant start electronic ballast.


For Technical Support:

<https://lunera.com/freshdesk.com/support/home>

© 2017 Lunera Lighting, Inc. All Rights Reserved. Lunera and the Lunera logo are registered trademarks; All other trademarks are the property of their respective owners. Specifications are subject to change without notice. This document is for informational purposes only.

REV11717

Dimensions

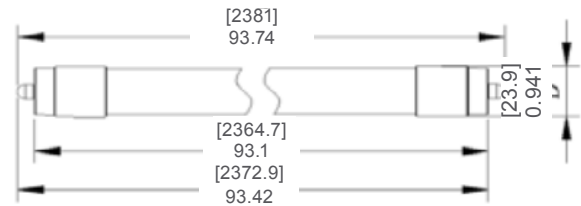

Application Notes

The Lunera T8 LED supports operation with LBF, NBF or HBF electronic ballasts.

The Lunera T8 LED is NOT rated for use in fully enclosed fixtures.

For applications containing dimming ballasts, please contact Lunera for specific compatibility.

Lamp installation in the following conditions and applications voids the product warranty:

- Fully enclosed fixtures
- Installation with an incompatible ballast, line voltage, or LED Drivers
- Installation in cracked, broken, dirty, or rusty tombstones
- Installation in wet areas
- Installation with HBF ballast reduces product warranty to 4 years
- Improper ballast wiring (e.g. 4-lamp ballast wired to run a 2-lamp application)

Socket Type

Single-Pin (Fa8)



CAUTION

Turn power off when installing the lamp.

CAUTION - IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT THE MANUFACTURER.



www.lunera.com T (650) 241-3875