

LUNERA MH LAMP GEN 2


Installation Guide

Horizontal, Mogul (E39 / EX39)



Installation Instructions

- 1. Power OFF the MH wall pack, shoebox, or other horizontal-mount fixture into which you will install the LUNERA MH LED Lamp.**
Wait for approximately 10 minutes before touching the existing MH bulb.
- 2. Carefully remove the existing MH bulb.**
Unscrew the lamp from the base slowly to avoid breakage. Be sure to properly recycle the MH lamp.
- 3. Make sure the existing bulb wattage matches the Lunera MH LED Lamp equivalent wattage.**
Check the lamp enclosure to ensure the Lunera MH LED Lamp matches the lamp being replaced - i.e. Lunera MH LED Lamp 400W/320W is replacing a 400W or 320W metal halide. If the Lunera MH LED Lamp model does not match the rated fixture wattage, stop. Do not install.

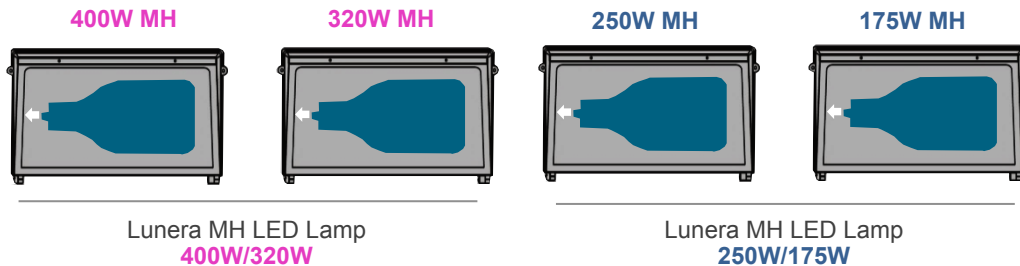







The Lunera MH LED Lamp is available with a CCTs of 5000K, 4000K or 3500K.

- 4. Install the MH LED Lamp into the existing E39/EX39 mogul base socket.**
If the lamp does not seat properly, do not apply force. Check to make sure the fixture has the E39/EX39 mogul required socket.
- 5. Turn ON power.**
If the Lunera MH LED Lamp flickers, strobos, or fails on installation, immediately Turn OFF power. The Lunera MH LED Lamp may not be compatible with the intended installation.

Application Notes






Intended Applications

The Lunera MH LED Lamp is designed to replace Metal Halide (MH) lamps in the following compatible applications.

<p>Wattage Compatibilities</p> <p>Lunera MH LED Lamp 400W/320W</p>  <p>Replaces</p> <p>400W MH or 320W MH</p> <p>Lunera MH LED Lamp 250W/175W</p>  <p>250W MH or 175W MH</p>	<p>Sockets</p> <p>E39 Mogul</p>  <p>EX39 Mogul</p> 	<p>Power Source</p> <p>Magnetic MH Ballast</p> 	<p>Mount</p> <p>Horizontal Mount</p>  <p>Fixture</p> <p>With or Without (sealed) Lens</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Incompatible Applications

Installation of the Lunera MH LED Lamp in **INCOMPATIBLE** MH applications may cause the Lunera MH LED Lamp flicker, strobe, or fail entirely.

<p>Wattage Compatibilities</p> <p>Lunera MH LED Lamp 400W/320W</p>  <p>Lunera MH LED Lamp 250W/175W</p>  <p>NOT acceptable to replace <i>any lamp or ballast wattage EXCEPT what is listed above in the intended applications including wattage and lamp type.</i></p>	<p>Power Source</p> <p>Electronic Ballast</p>  <p>Direct Line Voltage</p> 	<p>Sockets</p> <p>E26 Medium</p> 
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------